

## Double Line Lubricating Pump SONED® Model LDS 01

### Description


Lubricating pump SONED® model LDS 01 is indicated for applications in double line lubricating systems of large size machines or a series of grouped machines requiring safe and efficient lubrication.

Mounted on a set of dividers model DA , DB, DBM or DBU, this pump meets the most diversified project requirements including a large number of points to be lubricated and posted at large mutual distance, yet offering flexible application and installation.

### Specifications

Work pressure	400 kg/cm <sup>2</sup> maximum
Discharge	1.5 cm <sup>3</sup> / cycle
Lubricant	Soft grease until NLGI-2
Motor	Three-phase 220 / 380 V or 440 V
Reservoir	30 / 60 / 100 liters
Accessories	Pressure gauge, safety valve, level switch, fittings, pressure switch
Reduction ratio	60:1 / 50:1 / 20:1 / 10:1 / 5:1
Temperature	From -10 °C to +80 °C
Nº of outlets	1

Optional: Minimum or maximum or minimum and maximum level switch. Please, inform your choice.

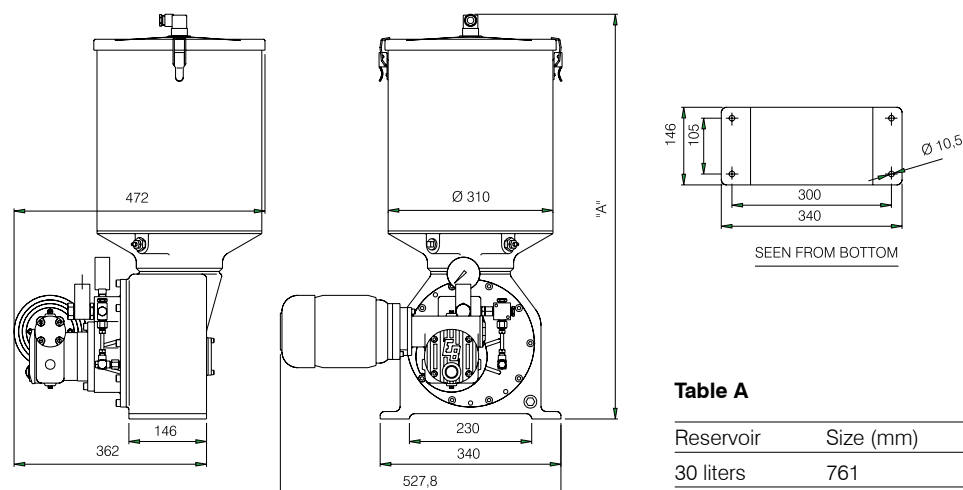

**Table A**

Reservoir	Size (mm)
30 liters	761
60 liters	1161
100 liters	1711

(Continue)